

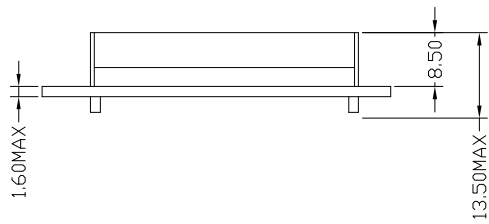


Customer: 华清益众	Customer Mode:	Customer Approve By:	REV	DESCRIPTION OF MODIFY	DATE
----------------	----------------	----------------------	-----	-----------------------	------

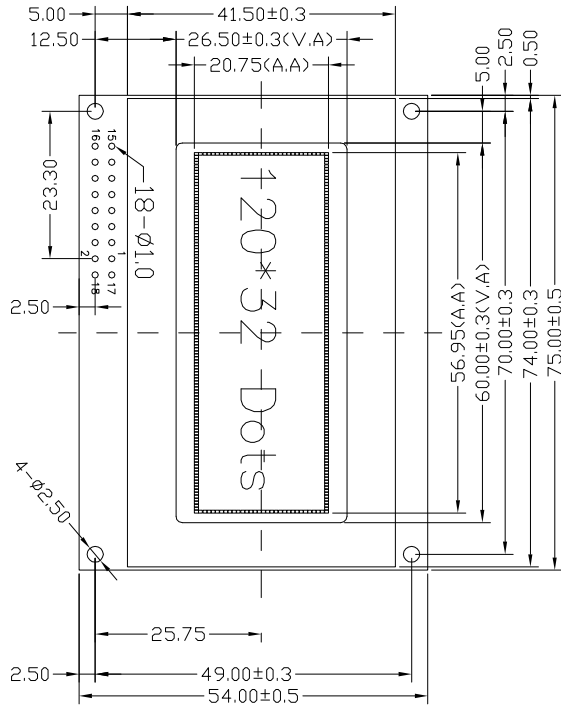

1	2	3	4	5	6	7	8	9
VSS	VDD	V0/POFF	A0	R/W	E1	E2	NC	DB0
10	11	12	13	14	15	16	17	18
DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED-	LED+

Detail DOTS



NOTES:

1. DISPLAY TYPE: STN(Y-G)
2. OPERATING VOLTAGE: 11.2V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/32Duty; 1/6.7Bias
6. VIEW DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT; POSITIVE
8. CONNECTOR: ZEBRA
9. IC: (CDB)IL1520
10. BACKLIGHT: LED Y-G

DRAWN BY:		<p>海南清华显示器件技术有限公司</p>		
CHECKED BY:				
TEL: (0898) 68631307				
FAX: (0898) 68631327				
E-mail: hnlcd@21cn.net		ICM NO.: HQM2079A	SIZE: A4	SHEET: 1 OF 1
		DWG NO.: HQ90090	REV: A	SCALE: NIS