


Customer: 华清益众	Customer Mode:	Customer Approve By:	REV.	DESCRIPTION OF MODIFY	DATE
----------------	----------------	----------------------	------	-----------------------	------

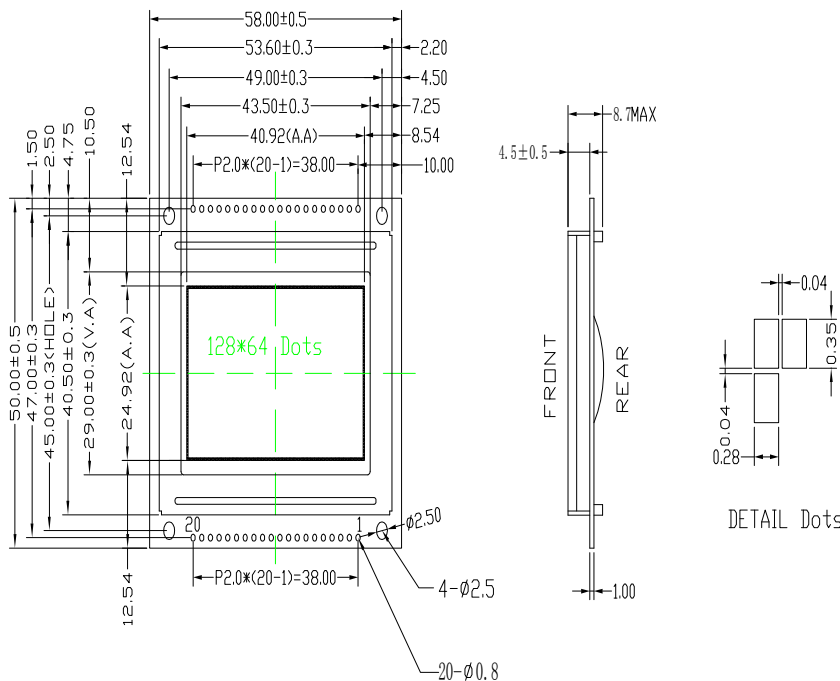

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RST
18	VOUT
19	LED+
20	LED-

NOTES:

- 1. DISPLAY TYPE: **FSTN(B-W)**
- 2. OPERATING VOLTAGE: 8.5V
- 3. OPERATING TEMPERATURE: -20°C~70°C
- 4. STORAGE TEMPERATURE: -30°C~80°C
- 5. DRIVE MODE: 1/64Duty; 1/7Bias
- 6. VIEW DIRECTION: 6:00
- 7. POLARIZER TYPE: TRANSFLECTIVE; POSITIVE
- 8. CONNECTOR: ZEBRA
- 9. IC: (COB)KS0107&KS0108
- 10. BACKLIGHT: LED SIDE WHITE

DRAWN BY :	HAINAN QINGHUA LCD TECHNOLOGY DEVELOPMENT CO.,LTD	UNITS: mm TOL: ±0.2
CHECKED BY :		
TEL: (0898) 68631307	LCM NO.: HQM2081A	SIZE: A4
FAX: (0898) 68631327	DWG NO.:	REV: A
E-mail: Hn1cd@21cn.net		SHEET: 1 OF 1 SCALE: NTS