
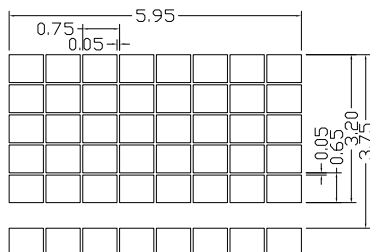


- NOTE:
- 1.LCD TYPE: STN POSITIVE,TRANSFLECTIVE,Y-G COLOR.
 - 2.DRIVE METHOD: 1/16DUTY,1/4BIAS, 5.0V/cd.
 - 3.VIEWING DIRECTION: 6:00 CLOCK
 - 4.OPERATING TEMP: -20 ~ +70°C
STORAGE TEMP -30 ~ +85°C
 - 5.BACK LIGHTING:LED Unit(Transmissive + Y_G)
 - 6.CONROLLER: KS0066

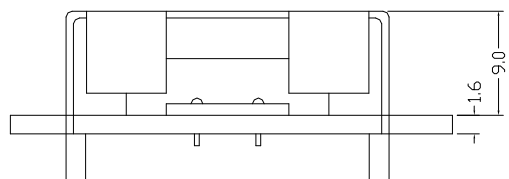

| | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| SIGNAL | GND | VDD | V0 | RS | R/W | E | DB0 | DB1 |
| PIN | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| SIGNAL | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | A | K |