


1	VSS	2	VDD	3	V0	4	RS	5	R/W	6	E	7	DB0	8	DB1
9	DB2	10	DB3	11	DB4	12	DB5	13	DB6	14	DB7	15	LED(+)	16	LED(-)

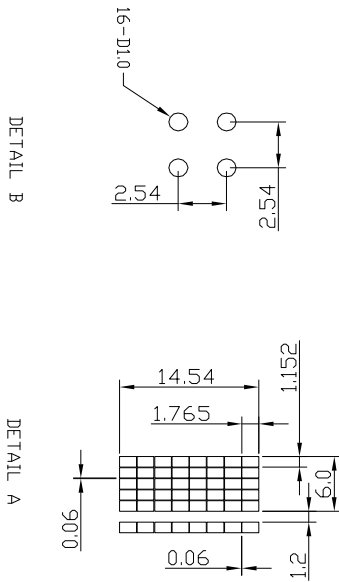

- NOTES:
1. DISPLAY TYPE: STN(Y-G)
 2. OPERATING VOLTAGE: 5.0V
 3. OPERATING TEMPERATURE: -10°C~60°C
 4. STORAGE TEMPERATURE: -20°C~70°C
 5. DRIVE MODE: 1/16Duty; 1/5Bias
 6. VIEW DIRECTION: 6:00
 7. POLARIZER TYPE: TRANSPARENT, POSITIVE
 8. CONNECTOR: ZEBRA
 9. IC: <COB>SPLC780D&SPLC100A2
 10. BACKLIGHT: LED YELLOW-GREEN