
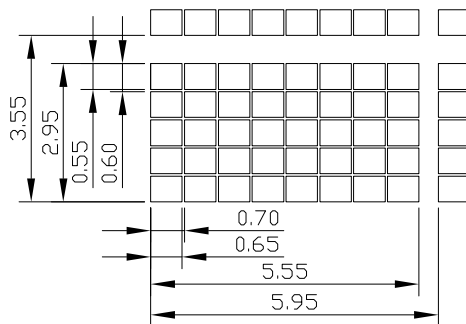


- NOTE:
- 1.LCD TYPE: STN POSITIVE,TRANSFLECTIVE,Y-G COLOR.
  - 2.DRIVE METHOD: 1/16DUTY,1/4BIAS, 5.0V
  - 3.VIEWING DIRECTION: 6:00 CLOCK
  - 4.OPERATING TEMP: -20 ~ +70°C  
STORAGE TEMP -30 ~ +85°C
  - 5.BACK LIGHTING:LED Unit(Transmissive + Y-G)
  - 6.CONTROLLER: KS0066+KS0065

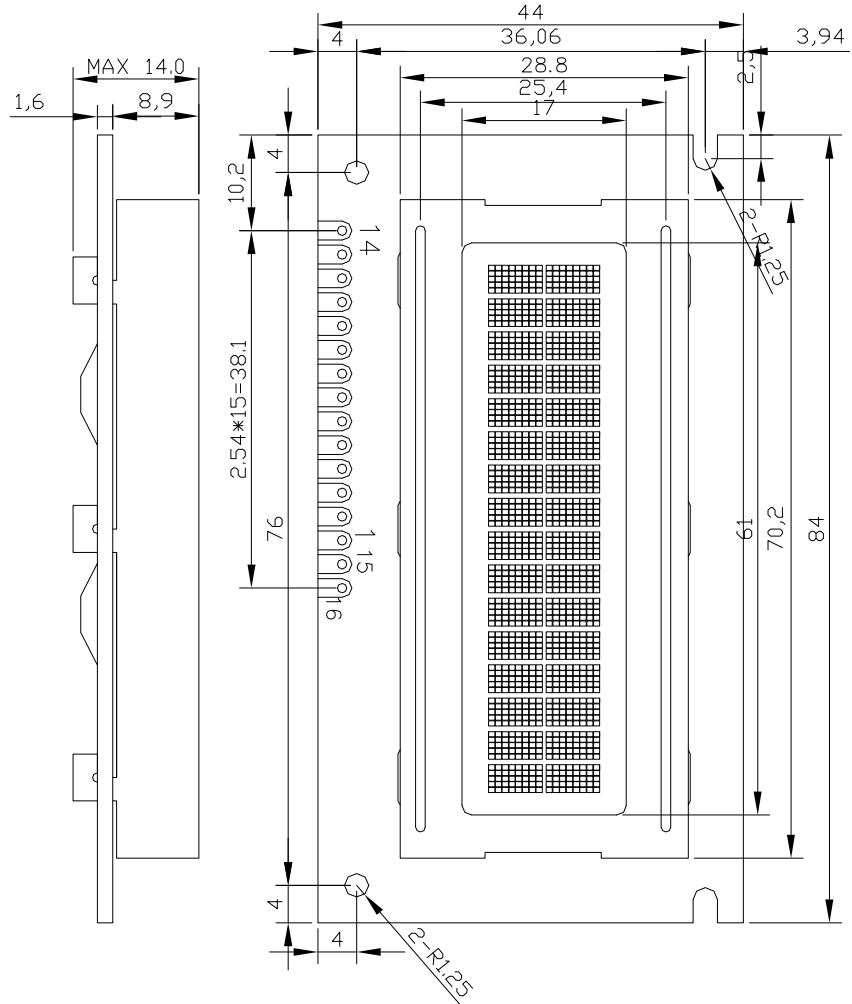

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	GND	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	K	A