PIN NO.	1	2	3	4	5	6	7	8
SIGNAL	Vss	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO.	9	10	11	12	13	14	15	16
SIGNL	DB2	DB3	DB4	DB5	DB6	DB7	A	K
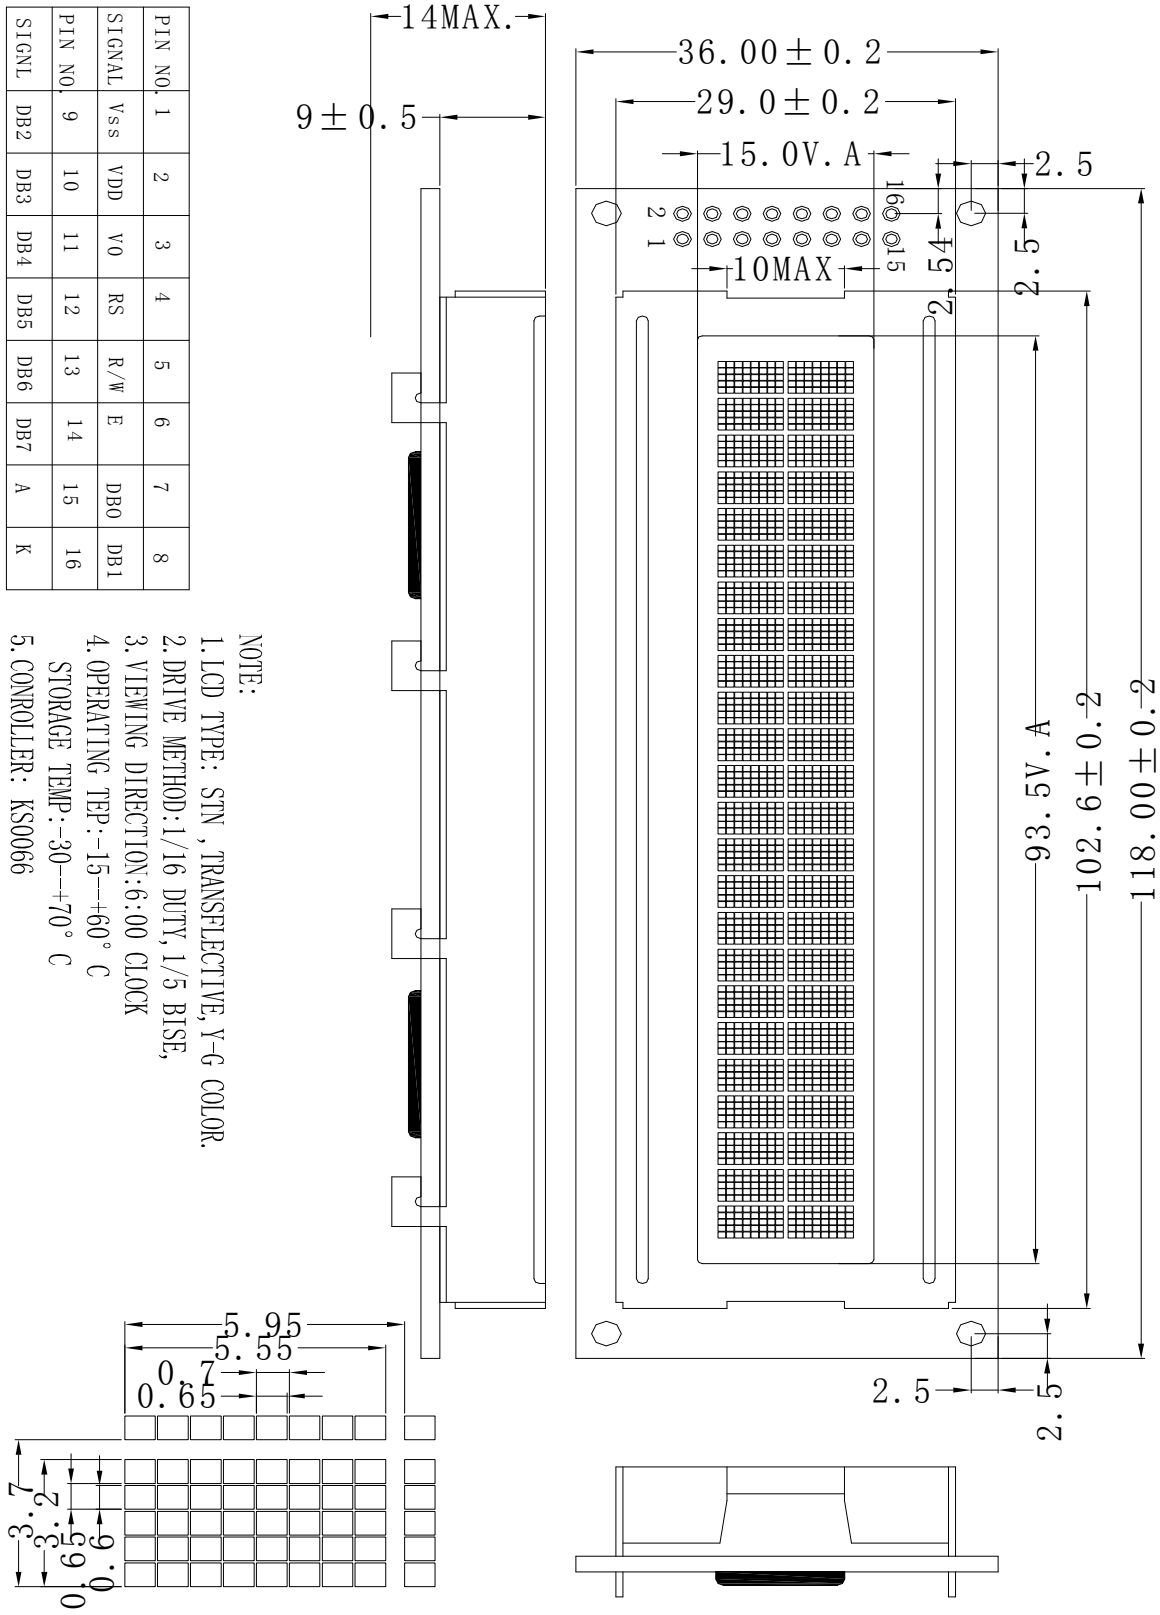
NOTE:
1. LCD TYPE: STN ,TRANSFLECTIVE,Y-G COLOR.
2. DRIVE METHOD:1/16 DUTY,1/5 BISE,
3. VIEWING DIRECTION:6:00 CLOCK
4. OPERATING TEP:-15--+60° C
   STORAGE TEMP:-30--+70° C
5. CONROLLER: KS0066